




Canon

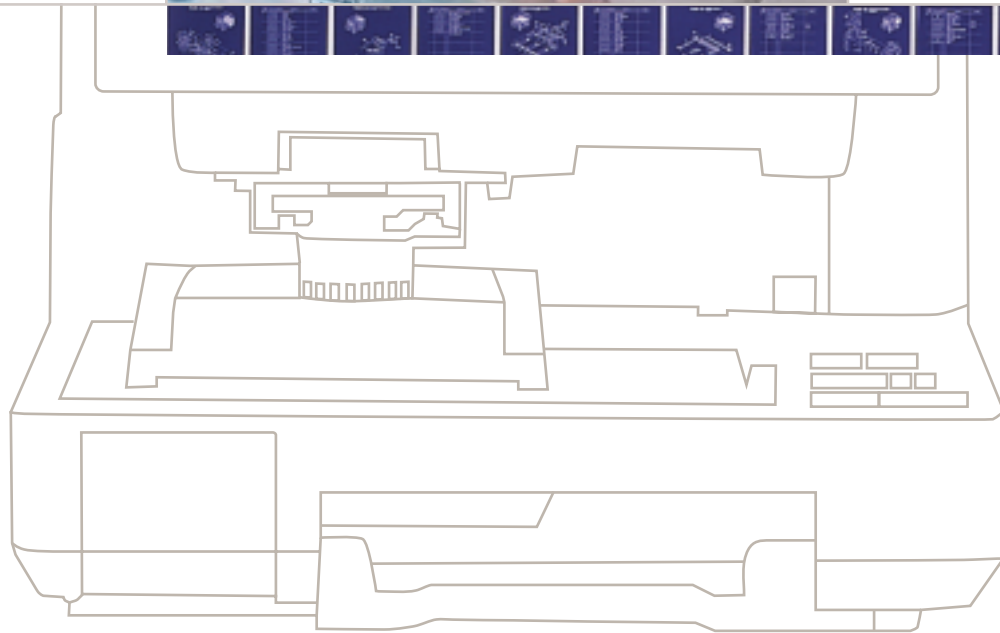


MP-60
Microprinter 60

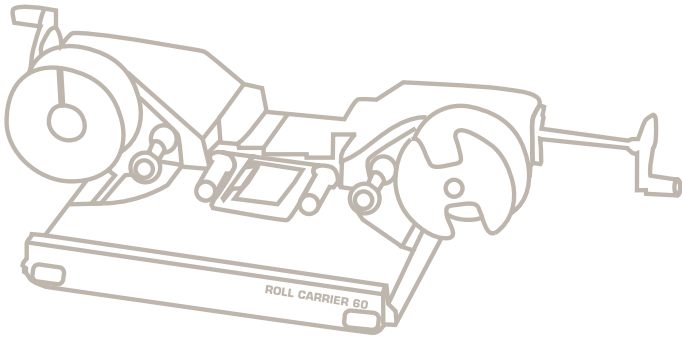

Roll Carrier 60

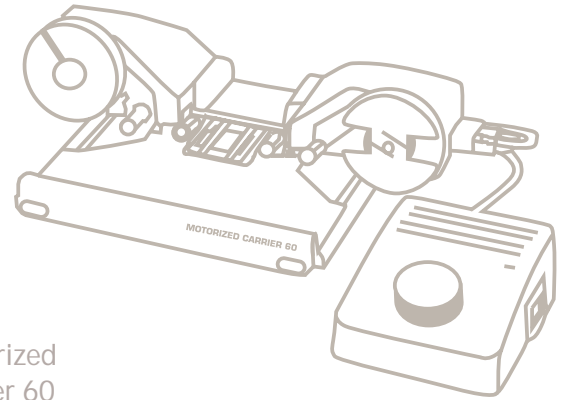

Motorized Carrier 60

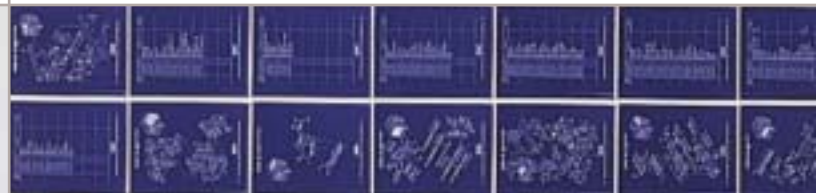

Fast and Convenient

The MP-60 warms up in just 25 seconds and requires only 10 seconds to deliver an initial print in its conveniently located front paper tray. The unit features a print speed of eight prints per minute, a manual control lever for simple density adjustment, and offers convenient paper handling, thanks to a snap-in, 250-sheet cassette tray. What's more, users can preset as many as nine copies for multiple printing, as well as obtain clean, borderless prints and optimum image contrast through optional Masking Printing and Automatic Exposure Control Functions.

Superb Optics

World-renowned Canon optics provide sharp screen images and enable precision reproduction of images from all types of microfiche. The MP-60 features a single zoom lens covering 17X to 47X that handles all standard COM fiche images. Prism-mounted lenses are also available to handle document fiche and rollfilms.


Built-in Versatility

Optional, roll carriers equip the MP-60 to handle rollfilms. Moreover, the system's standard bimodal capability is facilitated by a simple cartridge exchange.

Economical Operation

The MP-60 is specially designed to offer the optimum in efficient operation. A unique power-saving, Reader-only Mode conserves power consumption when the MP-60 is used for reading only. Furthermore, because the system uses Canon's exclusive all-in-one MP-20 Cartridge System, virtually no maintenance is required to keep the unit in top operating condition. A simple replacement of the MP-20 Cartridge lets the MP-60 consistently deliver top-quality printouts.

ALL THE BENEFITS OF CANON'S PATENTED IMAGING CARTRIDGE TECHNOLOGY ARE BUILT INTO MICROGRAPHICS PRODUCTS, TOO!

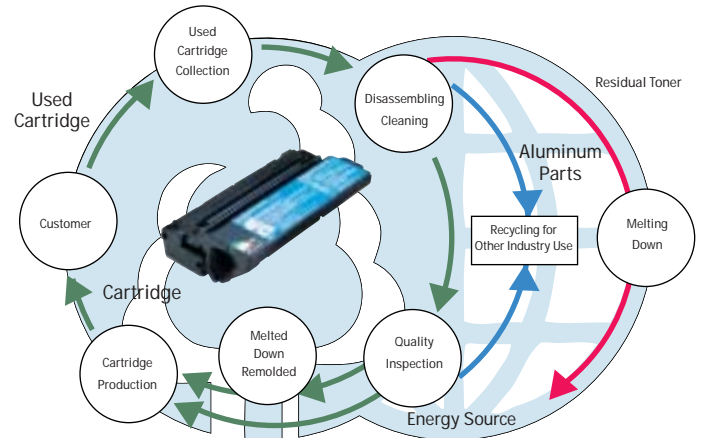

Economical to operate and easy to use, the Canon Microprinter 60 sets new performance standards for reliable reproduction of microform images. Canon's patented Single Cartridge System contains almost everything that can run out or wear out—toner, drum, and development unit—in one easily replaceable cartridge, for virtually maintenance-free performance.

Desktop Installation

Conveniently unobtrusive, the MP-60 requires just 19" x 28" of desktop space. And getting the system up and running is also a convenient and easy procedure. Users simply insert the MP Cartridge and Paper Supply Cassette, activate the "ON" switch, and the MP-60 is ready for use.

Comfortable Reading

The MP-60 features a built-in fiche carrier with an easy indexing system, making fiche loading and image location effortless procedures. A specially coated, 11" x 11" screen with reading cursor offers comfortable viewing of on-screen images. Image viewing is further enhanced by the system's single, wide-range zoom lens for COM fiche reproduction and by optional, replaceable single-magnification lenses with optical image rotation.

SPECIFICATIONS

Microprinter 60


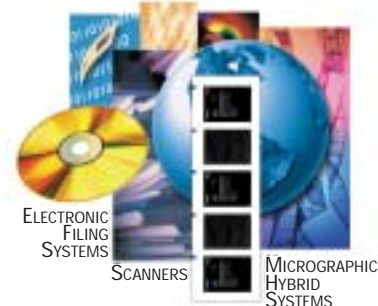


Image Filing Systems Division
Authorized Full Line Dealer Network

Type:	Desktop-type Reader-printer
Print Process:	Canon MP Cartridge Plain-paper Process; Single Component Dry Toner Projection System
Film Types:	Both Negative and Positive Images of Silver, Vesicular, or Diazo Film
Film Formats:	Built-in Carrier for Standard 4" x 6" Fiche/Jacket; Optional Motorized Carrier 60 for 16mm Rollfilm and Manual Carrier 60 for 16mm/35mm Rollfilm
Indexing:	Interchangeable Grid-index Plates for Built-in Fiche Carrier
Screen:	11-3/4" x 11-3/4" Rear Projection Type with Print Frame Markings and Adjustable Reading Cursor
Lenses (Optional)	
Zoom Lenses:	17X - 47X, 24.5X - 35.5X with Prism
Single-magnification Lenses:	29X, 33X, 35.5X
Prism Lenses:	19X, 23.5X, 33X, 35.5X, 41X, 47X
Zooming:	Manual Adjustment Ring for Zoom Lens; Slide-in Replacement of Other Lenses
Focusing:	Manual by Lens Focusing Fins; Constant Focus with Floating-lens System
Image Rotation:	360° by Adjustment Ring for Prism Lenses
Print Size:	8-1/2" x 11"
Paper Supply:	Automatic-feed 250-sheet Cassette
Print Speed:	8 Prints per Minute; Approximate Warm-up Time is 25 Seconds
Multiprint:	1 - 9 with LED Countdown Indication
Standard Features:	Reader-only Mode Bimodal Capability by Simply Changing Cartridge Manual Slide Lever Density Control Adjustment Self-diagnosis with LED Indication Warning System Masking Function
Supplies:	MP Cartridge 20N for Negative Film; 20P for Positive Film
Light Source:	20V 115W Halogen Lamp
Electrical Requirements:	120V 60Hz 9.2A
Dimensions (H x W x D):	26-7/8" x 19" x 28-3/4"
Weight:	83 lb.
Operational Environment:	50 - 90° F, 10 - 80% RH
Options:	Workstation I, for MP-60, Motorized Carrier 60, Manual Carrier 60, Automatic Exposure Control Function, Border Erasure Unit, Dust Cover

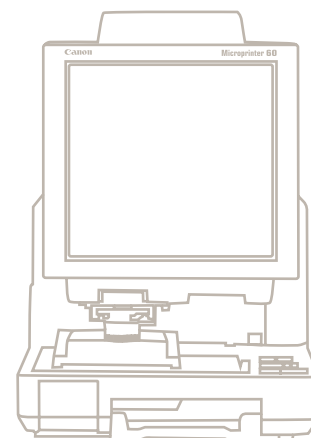

Canon is a registered trademark, and Canon Know How and the GENUINE logo are trademarks of Canon Inc. IMAGEANYWARE is a service mark of Canon U.S.A., Inc. All other terms and product names may be trademarks or registered trademarks of their respective owners, and are hereby acknowledged.

All specifications are subject to change without notice.


Canon KNOW HOW™

1-866-60-CANON
www.usa.canon.com

Canon U.S.A., Inc.
One Canon Plaza
Lake Success, NY 11042

0037W022

0503-MP60-10M

 PRINTED ON RECYCLED
PAPER IN THE U.S.A.

